

TEST REPORT

SLIP RESISTANCE MEASUREMENT OF **EXISTING PEDESTRIAN SURFACES** AS/NZS.4663:2004 Appendix A - Wet Pendulum Testing

Prepared For:

Treescape

Site Tested:

Aotea Square

Test Date:

04-02-2020







AUSTRALIA NEW ZEALAND GLOBAL


Independent Slip Testing Services

+61 (0) 411 600 733 www.sliptesting.com.au +64 (0) 279 735 266 www.sliptesting.co.nz

Report Prepared for: Treescape Client Address: 21 Huia Road, Otahuhu Auckland 1062

Property Tested: Aotea Square Date of Test: 04-02-2020 Program #:2000 Page (W): 1 of 1

Test Location	Surface Type	Surface Coating	Surface Conditions	Slider Conditioning	British Pendulum Number (BPN)	Slip Resistance Value & Slope Correction Value	TEST RESULTS
Test Area 1.	black	n/a	environment: external (uncovered area)	P400	63	(SRV)	Mean BPN result after
Aotea Square - Tree surrounds	shredded		slope: <2 degrees	79	64	62	adjustments
	rubber		surface: textured		60		
			test direction: anticipated pedestrian travel		61	(SCV)	62
			other observations: n/a		64	n/a	
60			COMMENTS:	DISCLAIMER: ISTS accepts no civil liability or responsibility for any actions whatsoever			

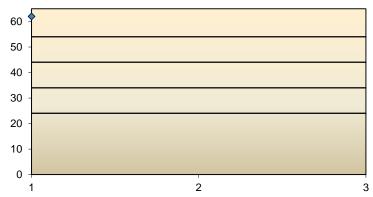

COMMENTS:

Temperature: 28 deg.C Weather: Overcast

Surface Cleaning: Tested as found

Testing Instrument W4- Serial #: SK1578

Testing Technician: B.Yarham

ISTS GLOBAL HEADQUARTERS:

124 Hindes Street Lota QLD 4179 Australia Have a successful dav!

Signatory: Mick Walton

this report is prohibited.

identified above. The slip test report remains the property of ISTS. This report contains privileged and confidential information. The unauthorised reproduction of Accredited for compliance with ISO/IEC 17025 testing and calibration. NATA is a signatory to the APLAC mutual recognition arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

that may arise as a result of the tests and the publication and issue of this test report. The test report is intended for viewing purposes solely for the named recipient



Testing was carried out using the Wet Pendulum Test method using Slider 96 (4S rubber) in accordance with Australian Standard AS/NZS.4663:2004 Appendix A.

...Considering pedestrian surface enhancements, or developing your property?



地板产品的抗滑性测量

If you are selecting, purchasing or installing pedestrian surface materials, an independent, accredited classification is a useful tool providing confidence to all stakeholders the product will perform as specified.

Independent Slip Testing Services is the global leader in accredited slip resistance measurement and classification of pedestrian surface materials prior to installation.

..see the ISTS 'GPC Results Interpretation Booklet' for guidance on pedestrian surface product selection.



TILES PAVERS STONE TIMBER VINYL RUBBER METAL TAPES COATINGS GRATINGS CONCRETE CARPETS STEP-NOSINGS TACTILES MOSAICS GLASS

Contact us any time if you have questions.



END OF TEST REPORT